


# H05VVC4V5-K (NYSLYCYÖ-JZ) flexible, number coded, oil resistant, EMC-preferred type, meter marking

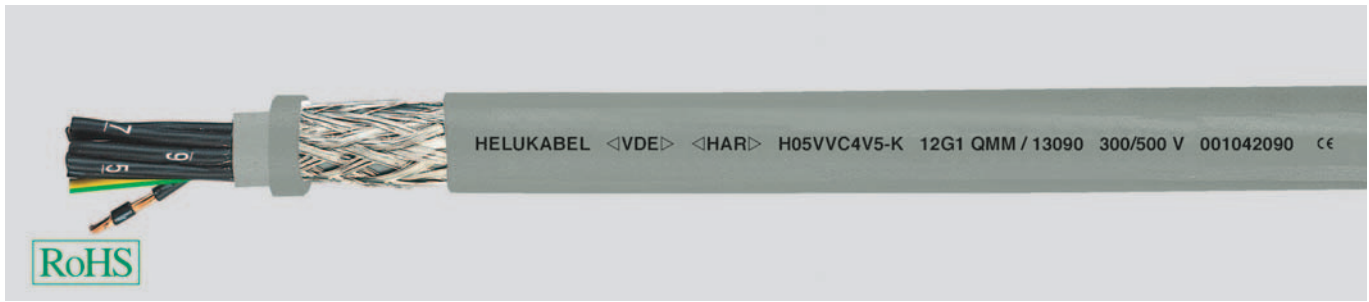

## Technical data

- Control cable, special PVC with oil resistant outer jacket to DIN VDE 0281 part 13, HD 21.13S1 and IEC 60227/74
- Temperature range**  
flexing -5°C to +70°C  
fixed installation -40°C to +70°C
- Nominal voltage**  $U_0/U$  300/500 V
- Test voltage**  
core/core 2 kV, 5 min  
core/screen 2 kV, 5 min
- Breakdown voltage** min. 4000 V
- Insulation resistance**  
min. 20 MΩm x km
- Coupling resistance**  
at 30 MHz  $\leq 250$  Ω/km
- Minimum bending radius**  
flexing 10x cable  $\emptyset$   
fixed installation 5x cable  $\emptyset$
- Radiation resistance**  
up to 80x10<sup>6</sup> cJ/kg (up to 80 Mrad)

## Cable structure

- Bare copper, fine wire stranded conductor to DIN VDE 0295 cl. 5, BS 6360 cl. 5, HD 383 and IEC 60228 cl. 5
- Special PVC core insulation T12 to DIN VDE 0281 part 1
- Black cores with white figure imprint to DIN VDE 0293
- Green-yellow earth core in the outer layer (3 cores and above)
- Cores stranded in layers with optimal lay-length
- Special PVC inner sheath, TM2 to DIN VDE 0281 part 1
- Tinned copper braided screening, covering approx. 85%
- Special PVC outer jacket, TM5 to DIN VDE 0281 part 1, HD 21.1.S4/A16
- Colour grey (RAL 7001)

## Properties

- PVC self-extinguishing and flame retardant according to VDE 0482-332-1-2, DIN EN 60332-1-2/ IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)
- Oil resistant to HD/EN 60811-2-1
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

## Note

- G = with green-yellow earth core; x = without green-yellow earth core (OZ).
- AWG sizes are approximate equivalent values. The actual cross-section is in mm<sup>2</sup>.
- unscreened analogue type:**  
**H05VV5-F (NYSLYÖ-JZ)**, see page A 12

## Application

These cables are used for flexible use for medium mechanical stresses with free movement without tensile stress or forced movements in dry, moist and wet rooms but not suitable for open air. These are designed as control and connecting cables to machines, tool machineries, conveyor belts and production lines. These cables are not effected to the chemical influences. Cables for moist and wet rooms, specially used for machines in breweries, bottling plants and car washing stations.

These cables may be allowed to move once installed provided that the cables are not mechanically stressed during movement. The interconnection of parts of machines used for manufacturing purposes including machine tools where some degree of protection against electromagnetic interference is required.

**EMC** = Electromagnetic compatibility

To optimise the EMC features we recommend a large round contact of the copper braiding on both ends.

**CE** = The product is conformed with the EC Low-Voltage Directive 2006/95/EG.

Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer $\emptyset$ app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.	Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer $\emptyset$ app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
13951	2 x 0,5	8,0	41,0	92,0	20	13957	2 x 0,75	8,3	46,0	102,0	18
13060	3 G 0,5	8,4	45,0	109,0	20	13072	3 G 0,75	8,8	57,0	115,0	18
13061	4 G 0,5	9,1	54,0	126,0	20	13073	4 G 0,75	9,8	63,0	150,0	18
13062	5 G 0,5	10,1	66,0	156,0	20	13074	5 G 0,75	10,8	76,0	173,0	18
13063	6 G 0,5	10,7	73,0	176,0	20	13075	6 G 0,75	11,4	82,0	195,0	18
13064	7 G 0,5	11,4	79,0	192,0	20	13076	7 G 0,75	12,1	100,0	235,0	18
13952	8 G 0,5	12,5	82,0	211,0	20	13958	8 G 0,75	12,7	112,0	268,0	18
13065	9 G 0,5	12,5	94,0	230,0	20	13077	9 G 0,75	13,8	130,0	285,0	18
13066	12 G 0,5	13,5	137,0	280,0	20	13078	12 G 0,75	14,3	175,0	327,0	18
13953	14 G 0,5	14,2	142,0	302,0	20	13959	14 G 0,75	14,4	190,0	362,0	18
13067	18 G 0,5	15,8	156,0	384,0	20	13079	18 G 0,75	16,9	240,0	488,0	18
13068	25 G 0,5	18,6	250,0	556,0	20	13080	25 G 0,75	20,0	306,0	654,0	18
13954	27 G 0,5	18,6	255,0	599,0	20	13960	27 G 0,75	20,0	326,0	708,0	18
13069	34 G 0,5	20,8	316,0	634,0	20	13081	34 G 0,75	22,1	346,0	821,0	18
13955	36 G 0,5	20,8	320,0	620,0	20	13961	36 G 0,75	22,1	358,0	899,0	18
13129	41 G 0,5	23,0	348,0	770,0	20	13130	41 G 0,75	23,9	403,0	970,0	18
13070	50 G 0,5	25,0	407,0	970,0	20	13082	50 G 0,75	26,8	470,0	1160,0	18
13071	61 G 0,5	26,8	520,0	1072,0	20	13083	61 G 0,75	29,4	550,0	1402,0	18
13956	65 G 0,5	28,4	563,0	1198,0	20	13962	65 G 0,75	31,2	594,0	1504,0	18

Dimensions and specifications may be changed without prior notice. (RA01)

Continuation ▶

# H05VVC4V5-K (NYSLYCYÖ-JZ) flexible, number

coded, oil resistant, EMC-preferred type, meter marking



A

Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.	Part No.	No. cores x cross-sec. mm <sup>2</sup>	Outer ø app. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
13963	2 x 1	8,6	54,0	114,0	17	13985	2 x 2,5	11,4	110,0	190,0	14
13084	3 G 1	9,3	64,0	142,0	17	13109	3 G 2,5	11,7	148,0	243,0	14
13085	4 G 1	10,2	76,0	175,0	17	13110	4 G 2,5	12,8	169,0	280,0	14
13086	5 G 1	11,0	89,0	205,0	17	13111	5 G 2,5	13,9	220,0	342,0	14
13087	6 G 1	11,8	101,0	236,0	17	13112	7 G 2,5	15,9	284,0	439,0	14
13088	7 G 1	12,9	114,0	264,0	17	13979	8 G 2,5	18,7	314,0	489,0	14
13964	8 G 1	13,6	130,0	301,0	17	13113	12 G 2,5	20,6	470,0	760,0	14
13089	9 G 1	14,4	144,0	335,0	17	13980	14 G 2,5	22,5	504,0	890,0	14
13090	12 G 1	15,6	186,0	420,0	17	13114	18 G 2,5	24,3	572,0	1052,0	14
13965	14 G 1	15,7	198,0	433,0	17	13115	25 G 2,5	29,0	740,0	1375,0	14
13091	18 G 1	17,4	284,0	561,0	17	13981	27 G 2,5	29,8	971,0	1507,0	14
13966	19 G 1	17,4	307,0	584,0	17	13116	34 G 2,5	33,0	1179,0	1892,0	14
13092	25 G 1	21,1	387,0	766,0	17	13982	36 G 2,5	33,3	1268,0	1998,0	14
13967	27 G 1	21,9	410,0	822,0	17	13983	41 G 2,5	36,0	1473,0	2286,0	14
13093	34 G 1	24,1	500,0	996,0	17	13117	50 G 2,5	38,5	1660,0	2673,0	14
13968	36 G 1	23,8	511,0	1001,0	17	13118	61 G 2,5	42,0	1992,0	3085,0	14
13969	37 G 1	25,1	523,0	1018,0	17						
13131	41 G 1	26,0	578,0	1155,0	17						
13094	50 G 1	28,5	681,0	1300,0	17						
13095	61 G 1	30,1	710,0	1500,0	17						
13970	65 G 1	32,4	769,0	1510,0	17						
13971	2 x 1,5	9,1	64,0	146,0	16						
13096	3 G 1,5	10,2	82,0	176,0	16						
13097	4 G 1,5	10,9	99,0	207,0	16						
13098	5 G 1,5	11,6	123,0	235,0	16						
13099	6 G 1,5	12,4	125,0	279,0	16						
13100	7 G 1,5	13,5	148,0	314,0	16						
13972	8 G 1,5	15,6	172,0	345,0	16						
13101	9 G 1,5	15,6	187,0	380,0	16						
13102	12 G 1,5	16,8	274,0	500,0	16						
13973	14 G 1,5	18,3	294,0	560,0	16						
13103	18 G 1,5	20,0	386,0	707,0	16						
13974	19 G 1,5	20,4	394,0	723,0	16						
13104	25 G 1,5	24,2	531,0	950,0	16						
13975	27 G 1,5	24,6	546,0	1014,0	16						
13105	32 G 1,5	26,0	638,0	1133,0	16						
13106	34 G 1,5	26,3	671,0	1204,0	16						
13976	36 G 1,5	27,7	700,0	1261,0	16						
13977	37 G 1,5	27,7	720,0	1300,0	16						
13132	41 G 1,5	29,1	840,0	1453,0	16						
13107	50 G 1,5	34,0	997,0	1663,0	16						
13108	61 G 1,5	36,5	1120,0	1852,0	16						
13978	65 G 1,5	38,1	1197,0	1971,0	16						

Dimensions and specifications may be changed without prior notice. (RA01)

## Our Service on the Internet

Download centre    Logistic centre

Company    Products    Quality    **News**    Contact    Service    Opinion    Imprint

You are here: [Home](#)

Search

**Photovoltaic system**

A range of wires and accessories specially developed for installing solar plants.

**Welcome to HELUKABEL**

HELUKABEL® is a leader in the production of wires & cables, custom cables, cable accessories, data-network-bus-engineering and pre-assembled cable protection systems for robotics and handling systems.

- ▶ News
- ▶ Fairs
- ▶ Job posting
- ▶ Special offer's
- ▶ Press Contact

**HELUKABEL world-wide**

please select...

### News

Here you will find current information on the subjects of:  
 News – fairs – job posting – special offers – press contact.  
 Click on the topic to get more information.

[www.helukabel.de](http://www.helukabel.de)